

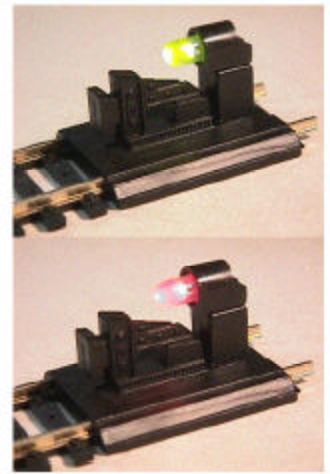


www.MoreLEDs.com
TOLL FREE 1-866-591-7391
Email sales@moreleds.com
**T-1 3/4 (5mm) BI-COLOR RIGHT
ANGLE LED INDICATOR**



XVB1LUGR59M

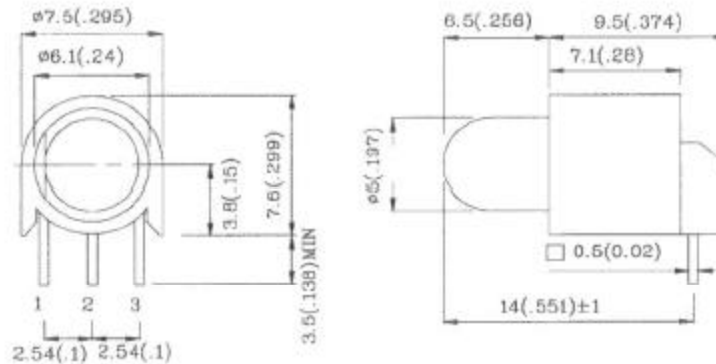

UL RATING: 94V-0
HOUSING MATERIAL: TYPE 66 NYLON

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.

Absolute maximum ratings ($T_A=25^{\circ}\text{C}$)		UR (GaAsP/GaP)	UG (GaP)	Unit
Reverse voltage	V_R	5	5	V
Forward current	I_F	30	25	mA
Forward current (peak) 1/10Duty cycle 0.1ms pulse width	I_{FS}	160	140	mA
Power dissipation	P_T	105	105	mW
Operating temperature	T_A	-40 - +85	-40 - +85	°C
Storage temperature	T_{stg}	-40 - +85	-40 - +85	
Lead solder temperature (2mm below package base)		260°C For 5 Seconds		

Operating Characteristics ($T_A=25^{\circ}\text{C}$)		UR (GaAsP/GaP)	UG (GaP)	Unit
Forward voltage (typ) ($I_F=20\text{mA}$)	V_F	2.0	2.2	V
Forward voltage (max) ($I_F=20\text{mA}$)	V_F	2.5	2.5	V
Reverse current ($V_R=5\text{V}$)	I_R	10	10	μA
Wavelength at peak emission ($I_F=20\text{mA}$)	λ_{peak}	627	565	nm
Wavelength at Dominate emission ($I_F=20\text{mA}$)	λ_D	625	568	nm
Spectral Line half width ($I_F=20\text{mA}$)	$\Delta\lambda$	45	30	nm
Capacitance ($V_F=0\text{V}$, $f=1\text{MHz}$)	C	15	15	pf

Part Number	Emitting Color	Emitting Material	Lens color	Luminous Intensity ($I_F=20\text{mA}$) mcd		Wavelength nm λ_P	Viewing Angle 2 θ 1/2
				min.	typ.		
XVB1LUGR59M	Red	GaAsP/GaP	White Diffused	20	58	627	60°
	Green	GaP		20	48		